


技术参数:

- 材料: 压铸铝
- 表面处理: 粉末喷涂
- 颜色: RAL 7037 (灰色)
- 温度范围:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 防护等级: IP65 (联锁状态, IEC 60529)
- 出线方向: 侧出线
- 出线孔数: 1
- 螺纹规格: PG21

Technical specification:

- Material: aluminium die-cast
- Surface: powder-coated
- Colour: RAL 7037(grey)
- Temperature range:  $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Degree of protection: IP65  
(acc.to IEC 60529 for coupled connector)
- Cable entry: side entry
- No. of cable entries: 1
- Thread size: PG21

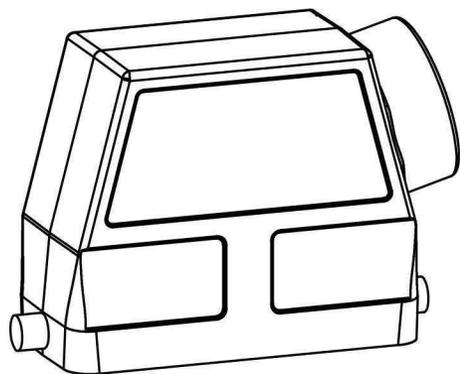

|               |              |                  |                |                 |            |                |            |   |                   |  |
|---------------|--------------|------------------|----------------|-----------------|------------|----------------|------------|---|-------------------|--|
|               |              |                  |                |                 |            | 表面处理<br>Finish | -          |   | 图号<br>Drawing No. | -  |
|               |              |                  |                |                 |            | 材料<br>Material | -          |   | 产品代号<br>Part Code | HS24B-SEH-2B-PG21  |
| 标记<br>Mark    | 处数<br>Number | 变更描述/Description |                | 姓名<br>Signature | 日期<br>Date | 比例<br>Scale    | 版本<br>REV. | 重量<br>Weight                                  | 数量<br>Qty.        | 产品名称<br>Part Name  |
| 绘图<br>Drawn   |              | 姓名/Name          | 日期/Date        | 姓名/Name         | 日期/Date    | 2:3            | V1.0       | 230g  | -                 | -  |
| 审核<br>Checked |              |                  |                |                 |            |                |            |   |                   |  |
| 工艺<br>Process | -            | -                | 批准<br>Approved |                 |            |                |            | All Dimensions in mm<br>Original Size DIN A 4 |                   | <br>沈阳思源科技有限公司<br>Shenyang Simuyuan Technology Co., Ltd. |