


技术参数:

- 材料: 压铸锌
- 表面处理: 粉末喷涂
- 颜色: RAL 9005 (黑色)
- 温度范围: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- 防护等级: IP68/IP69K
- 出线方向: 顶出线
- 出线孔数: 1
- 螺纹规格: PG13.5

Technical specification:

- Material: zinc die-cast
- Surface: powder-coated
- Colour: RAL 9005(black)
- Temperature range: $-40^{\circ}\text{C} - +125^{\circ}\text{C}$
- Degree of protection: IP68/IP69K
- Cable entry: top entry
- No. of cable entries: 1
- Thread size: PG13.5

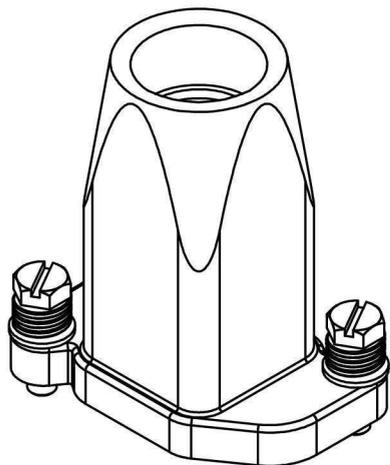

| | | | | | | | | | | |
|---------------|--------------|------------------|---------|----------------|-----------------|------------|-------------|--|-------------------|----------------------|
| | | | | | 表面处理 Finish | - | | | 图号 Drawing No. | - |
| | | | | | 材料 Material | - | | | 产品代号 Part Code | HVS3A-T0-2T/H-PG13.5 |
| 标记 Mark | 处数 Number | 变更描述/Description | | | 签名 Signature | 日期 Date | | | | 产品料号 Part No. |
| | | 姓名/Name | 日期/Date | | 姓名/Name | 日期/Date | 比例 Scale | 版本 REV. | 重量 Weight | 数量 Qty. |
| 绘图 Drawn | | | | 标准化 Stand. | - | - | 1:1 | V1.0 | 78g | - |
| 审核 Checked | | | | | | | | | | |
| 工艺 Process | - | - | | 批准 Approved | | | | | | |
| | | | | | | | | All Dimensions in mm Original Size DIN A 4 | | |
| | | | | | | | | | | |
| | | | | | | | | 沈阳思源科技有限公司 Shenyang Simuyuan Technology Co., Ltd. | | |