


1 2 3 4 5 6

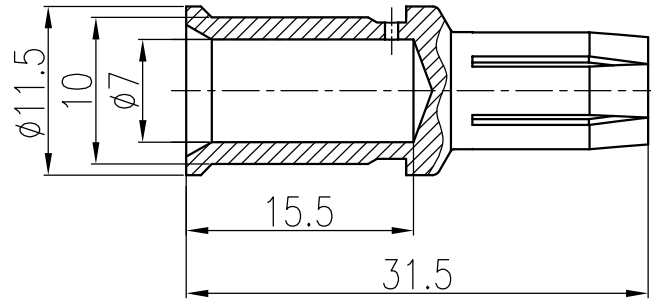


技术参数:

- 材料: 铜合金
- 表面处理: 镀银
- 额定电流: 70A
- 接触电阻: $\leq 0.5m\Omega$
- 线径范围: $25mm^2$
- 最大电缆直径: 11mm
- 剥线长度: 15.5mm
- 可插拔次数: ≥ 500
- 电缆绞线标准: IEC 60228-5

Technical specification:

- Material: copper alloy
- Surface: hard-silver plated
- Rated current: 70A
- Contact resistance: $\leq 0.5m\Omega$
- Wire gauge: $25mm^2$
- Max. insulation diameter: 11mm
- Stripping length: 15.5mm
- Mating cycles: ≥ 500
- For stranded fine wire acc. to: IEC 60228-5

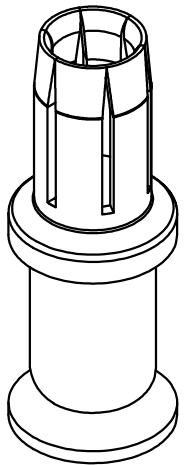

				表面处理 Finish		-				图号 Drawing No.		-	
				材料 Material		-				产品代号 Part Code		CKSF70-25	
标记 Mark		处数 Number		变更描述/Description				姓名 Signature		日期 Date		产品料号 Part No.	
		姓名/Name		日期/Date				姓名/Name		日期/Date		产品名称 Part Name	
绘图 Drawn				标准化 Stand.		-		比例 Scale		版本 REV.		重量 Weight	
审核 Checked								2:1		V1.1		9g	
工艺 Process		-		批准 Approved								数量 Qty.	
												-	
										All Dimensions in mm Original Size DIN A 4		 沈阳思沐源科技有限公司 Shenyang Simuyuan Technology Co., Ltd.	

1 2 3 4 5 6