



产品代号 Part code	产品料号 Part NO.	重量/Weight			线径/Wire Gauge		剥线长度 Stripping length
		g	mm ²	AWG	d	D	
CCSF-1.5		2.3	1.5	16	1.75	3	9
CCSF-2.5		2.32	2.5	14	2.25	3.5	9
CCSF-4.0		2.4	4	12	2.85	3.9	9.6
CCSF-6.0		2.62	6	10	3.5	5	9.6

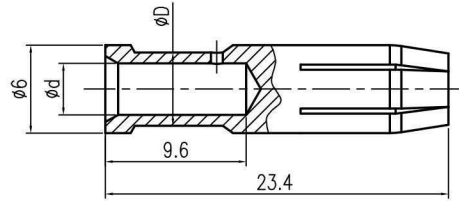

- 技术参数:
- 材料: 铜合金
 - 表面处理: 镀银
 - 额定电流: 40A
 - 接触电阻: ≤1mΩ
 - 线径范围: 1.5-10mm²(16-8 AWG)
 - 可插拔次数: ≥500

- Technical specification:
- Material: copper alloy
 - Surface: hard-silver plated
 - Rated current: 40A
 - Contact resistance: ≤1mΩ
 - Wire gauge: 1.5-10mm²(16-8 AWG)
 - Mating cycles: ≥500

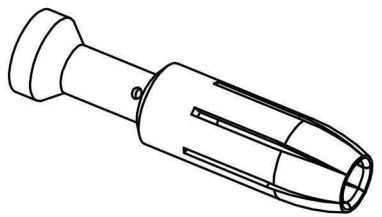

						表面处理 Finish	-		图号 Drawing No.	-
						材料 Material	-		产品代号 Part Code	CCSF-XX
标记 Mark	处数 Number	变更描述/Description			签名 Signature	日期 Date			产品料号 Part No.	-
		姓名/Name	日期/Date		姓名/Name	日期/Date	比例 Scale	版本 REV.	重量 Weight	数量 Qty.
绘图 Drawn				标准化 Stand.	-	-	2:1	V1.0	-	-
审核 Checked										
工艺 Process		-	-	批准 Approved						
								All Dimensions in mm Original Size DIN A 4		 沈阳思源科技有限公司 Shenyang Simuyuan Technology Co., Ltd